

MATTRESSES



OVERVIEW:

All Interior Resources mattresses are built in the US from the finest materials and components available. All of the materials are new with the exception of recycled steel and spring units.

The Interior Resources mattress collection is available in two standard ticking (outside cover) options:


- 3 ply vinyl that has a weight of 10.5 oz/sq yd with a non-woven fire barrier laminated to the reverse side
- Soflux Ox 210 denier nylon with a non-woven fire barrier laminated to the reverse side

Both ticking options are bacterial/fungal resistant, fluid-resistant, non-allergenic, and stain/tear resistant. All mattresses are constructed with inverted seams to protect against bed bugs. Seams are sewn closed on the inside of the mattress, and one short end is closed with a lock stitch seam.

FIRE CODES:

All mattresses have been lab tested to meet the following fire codes:

- Boston Fire Code IX-11
- Cal TB 129
- CPSC 16 CFR1632.4
- CPSC 16 CFR 1633

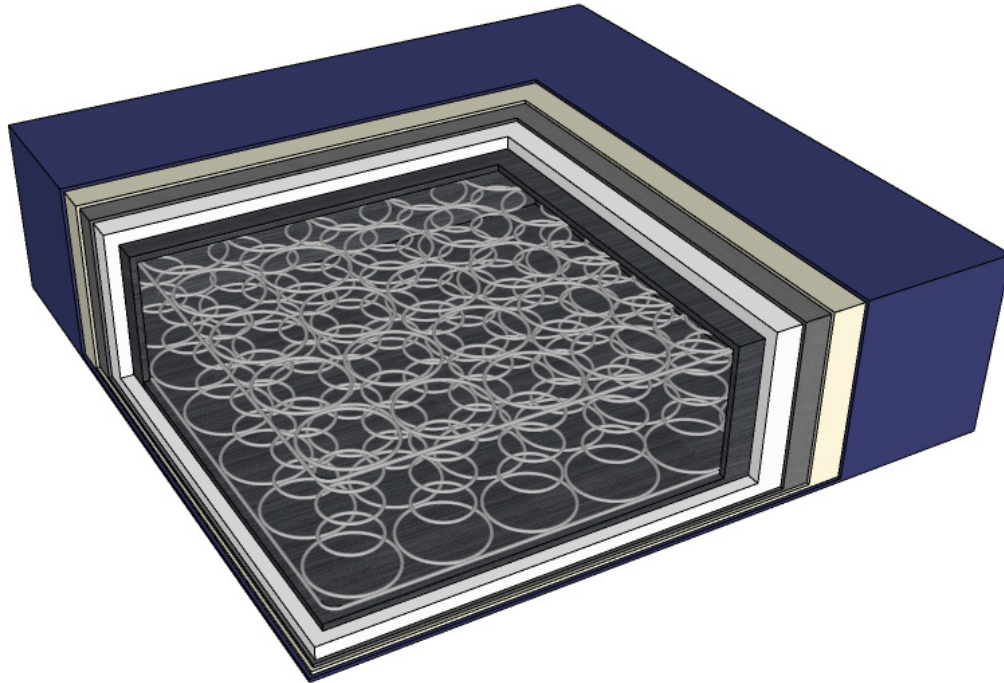

STANDARD MATTRESS SPECIFICATIONS:

INNER SPRING COIL UNIT:

- 312 coil / 13 gauge

BORDER SUPPORT ROD:

- 6 gauge

INSULATOR PAD:

- Garnetted pad (5 oz. per sq. ft.)

SURFACE PAD:

- 1" poly fiber pad (top and bottom surface)

CORNER PAD:

- 1/4 lb. treated cotton felt


PACKAGING:

- 3 mm. sealed plastic cover

FIRE CODES:

All mattresses have been lab tested to meet the following fire codes:

- Boston Fire Code IX-11
- Cal TB 129
- CPSC 16 CFR1632.4
- CPSC 16 CFR 1633

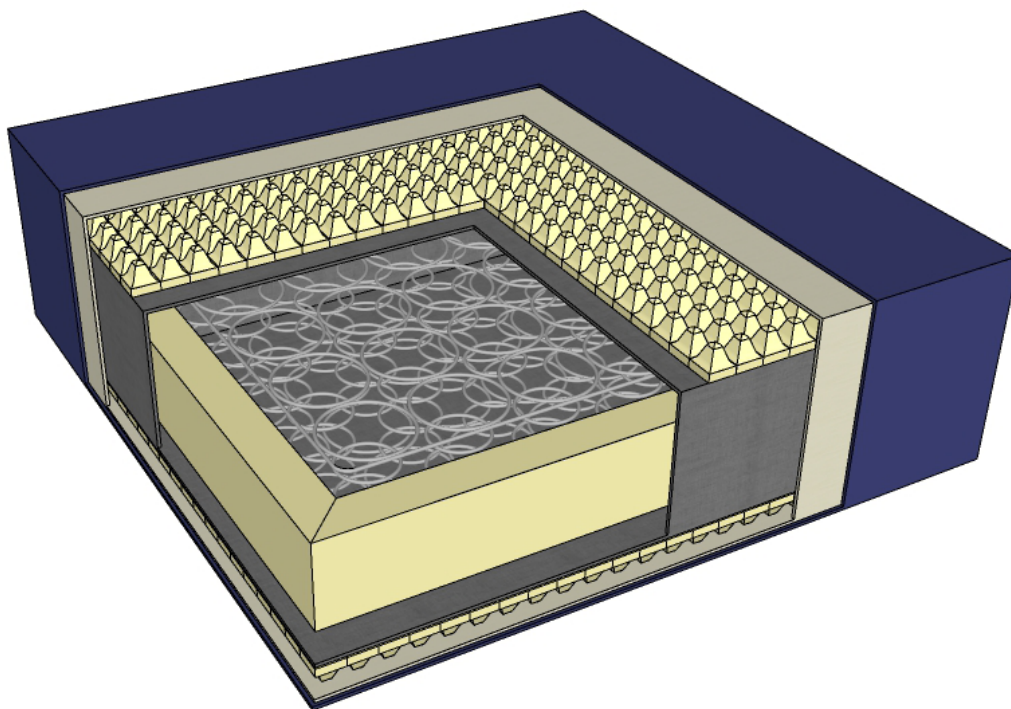

DUAL COMFORT MATTRESS SPECIFICATIONS:

INNER SPRING COIL UNIT:

- Low profile 13 gauge coil unit

BORDER SUPPORT:

- 1.8 lb. density foam perimeter

INSULATOR PAD:

- Garnetted pad (5 oz. per sq. ft.)

SURFACE PAD:

- 2" 1.8 lb. density convoluted foam (1 per side)

CORNER PAD:

- 1.8 lb. density foam


PACKAGING:

- 3 mm. sealed plastic cover

FIRE CODES:

All mattresses have been lab tested to meet the following fire codes:

- Boston Fire Code IX-11
- Cal TB 129
- CPSC 16 CFR1632.4
- CPSC 16 CFR 1633

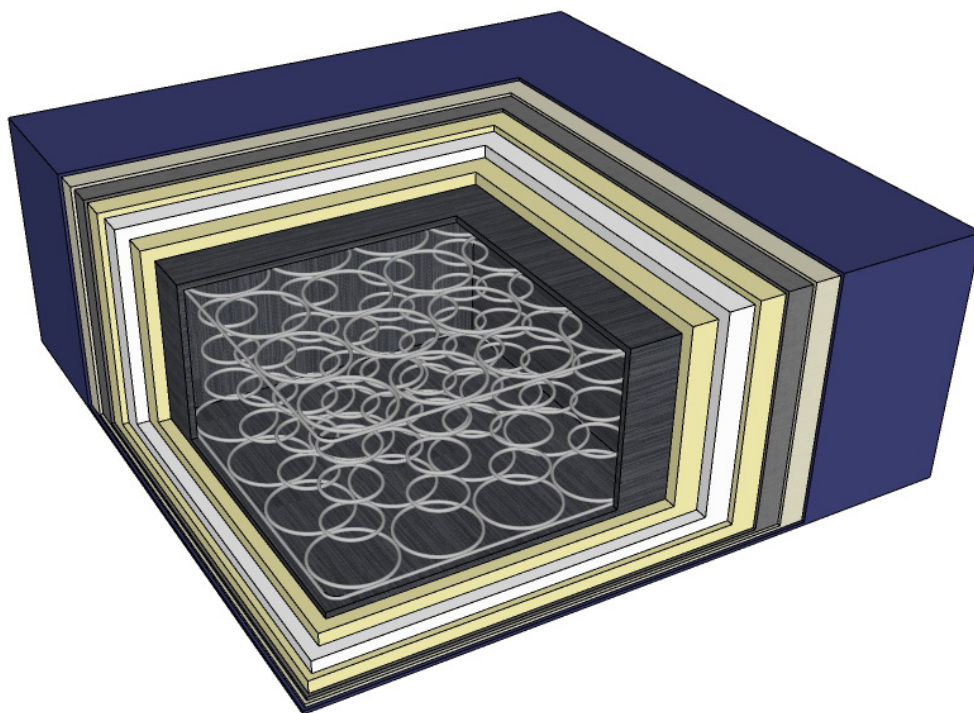

ELITE MATTRESS SPECIFICATIONS:

INNER SPRING COIL UNIT:

- 312 coil / 13 gauge

BORDER SUPPORT ROD:

- 6 gauge

SIDEWALL SUPPORT:

- Steel double edge vertical

INSULATOR PAD:

- Garnetted pad (5 oz. per sq. ft. - 2 per side)

SURFACE PAD:

- 1" 1.8 lb. density foam

COMFORT PAD:

- 1" poly fiber + 1/2" foam (2 per side)

CORNER PAD:

- 1/2 lb. treated cotton felt


PACKAGING:

- 3 mm. sealed plastic cover

FIRE CODES:

All mattresses have been lab tested to meet the following fire codes:

- Boston Fire Code IX-11
- Cal TB 129
- CPSC 16 CFR1632.4
- CPSC 16 CFR 1633

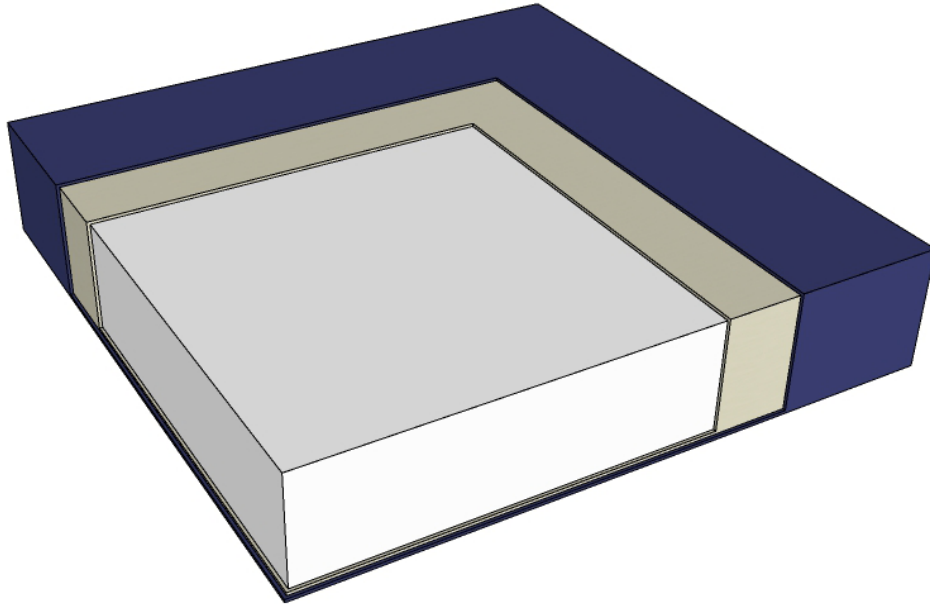

POLY FILL MATTRESS SPECIFICATIONS:

INNER SPRING COIL UNIT:

- 5" Compulush densified fiber core

PACKAGING:

- 3 mm. sealed plastic cover

FIRE CODES:

All mattresses have been lab tested to meet the following fire codes:

- Boston Fire Code IX-11
- Cal TB 129
- CPSC 16 CFR1632.4
- CPSC 16 CFR 1633